RECEIVED FEB 0 6 2020

2017060059

U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008

Expiration Date: November 30, 2018

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SEC	TION A - PROPERTY	INFORI	MATION		FOR INSUR	ANCE COMPANY USE	
I					Policy Numl	oer:	
NORMANTAITE LLC - TAMPA HOMES INC							
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.16112 4TH ST E					Company N	AIC Number:	
City			State		ZIP Code		
REDINGTON BEACH			Florida		33708		
A3. Property Description (Lot LOT 7, BLOCK 1, SIXTH ADD				gal Description, et	c.)		
A4. Building Use (e.g., Reside	ntial, Non-Residential,	Addition,	Accessory, e	etc.) RESIDEN	NTIAL		
A5. Latitude/Longitude: Lat.	27.815941 N	Long. 8	2.811130 W	Horizonta	l Datum: 🔲 NAD 1	927 X NAD 1983	
A6. Attach at least 2 photogra	phs of the building if the	e Certific	ate is being u	sed to obtain floo	d insurance.		
A7. Building Diagram Number	6						
A8. For a building with a crawl	space or enclosure(s):						
a) Square footage of crav	dspace or enclosure(s)	*15	10	650.00 sq ft			
b) Number of permanent f	lood openings in the cra	awispace	e or enclosure	e(s) within 1.0 foo	t above adjacent gra	ade <u>13</u>	
c) Total net area of flood	ppenings in A8.b	28	860.00 sq in				
d) Engineered flood open	ings? 🗵 Yes 🗌 N	lo					
A9. For a building with an attac	ched garage:						
a) Square footage of attact	hed garage		N/A sq ft				
b) Number of permanent t	lood openings in the at	tached g	arage within	1.0 foot above ad	acent grade 0		
c) Total net area of flood of	ppenings in A9.b		0.00 sq	in			
d) Engineered flood openi	d) Engineered flood openings?						
S	ECTION B - FLOOD	NSURA	NCE RATE	MAP (FIRM) INF	ORMATION	•	
B1. NFIP Community Name &	•		B2. County	Name		B3. State	
TOWN OF REDINGTON BEA	CH 125140		PINELLAS			Florida	
B4. Map/Panel B5. Suffix Number	B6. FIRM Index Date	Effe	RM Panel ective/ vised Date	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, us	levation(s) e Base Flood Depth)	
12103C0183 G	08-18-2009	09-03-		AE	11.00		
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:							
☐ FIS Profile ☒ FIRM ☐ Community Determined ☐ Other/Source:							
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 X NAVD 1988 Other/Source:							
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? Tyes 🕱 No							
Designation Date: N/A CBRS OPA							
L							

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the correspond	FOR INSL	FOR INSURANCE COMPANY USE				
Building Street Address (including Apt., Unit, Suite, and 16112 4TH ST E	Policy Nur	Policy Number:				
		IP Code 3708	Company	NAIC Number		
SECTION C - BUILDING	ELEVATION INFORM	ATION (SURVEY R	EQUIRED)			
*A new Elevation Certificate will be required whe C2. Elevations – Zones A1–A30, AE, AH, A (with BF	en construction of the buil	BFE), AR, AR/A, AR/	/AE, AR/A1-	Finished Construction -A30, AR/AH, AR/AO.		
Complete Items C2.a—h below according to the I Benchmark Utilized: GPS NAIL 18-0911	building diagram specifie Vertical Datui		to Rico only,	, enter meters.		
Indicate elevation datum used for the elevations			~ 			
☐ NGVD 1929 🗵 NAVD 1988 🗌 Oth						
Datum used for building elevations must be the s	same as that used for the	e BFE.	Check	the measurement used.		
a) Top of bottom floor (including basement, crav	wispace, or enclosure flo	or)		feet meters		
b) Top of the next higher floor	·		23.95	feet meters		
c) Bottom of the lowest horizontal structural men	mber (V Zones only)		N/A 🔀	feet meters		
d) Attached garage (top of slab)			3.65 ×	feet meters		
e) Lowest elevation of machinery or equipment (Describe type of equipment and location in Company)	servicing the building Comments)		12.02 X	feet meters		
f) Lowest adjacent (finished) grade next to build	ding (LAG)		3.40 X	feet meters		
g) Highest adjacent (finished) grade next to buil	ding (HAG)		3.70 ×	feet meters		
h) Lowest adjacent grade at lowest elevation of structural support		A-TT-Turbilin	3.70 ×	feet meters		
SECTION D - SURVEYO	OR, ENGINEER, OR A	RCHITECT CERTIF	ICATION			
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.						
Were latitude and longitude in Section A provided by	,		X Che	eck here if attachments.		
Certifier's Name JULIO C. RODRIGUEZ	License Number LS 6919		th	CESAR ROOM		
Title LAND SURVEYOR				cense Number		
Company Name GLOBAL PROJECTS SURVEYING LLC			7.74	LS 6919 2 70		
Address 11421 CALLAWAY POND DR			10,00	STATE OF		
City RIVERVIEW	State Florida	ZIP Code 33579	01-03-	-2020		
Signature	Date 01-03-2020	Telephone (813) 423-3483	Ext.			
Copy all pages of this Elevation Certificate and all attack	hments for (1) community	official, (2) insurance	agent/compa	any, and (3) building owner.		
Comments (including type of equipment and location,	per C2(e), if applicable)	1				
C2(e) A/C units (2) are located at the right side of the	house.					
HYDRO-STATICS CALCULATIONS 1 Sq Inch for every Sq Ft. (1650 S.F) 1650 Sq Inches Required Provide FLOOD FLAPS FFNF • 8 13 x 220 sq	រុ in = 2860 Sq in > 1650 ទ	Sq in Required				

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMP	ORTANT: In these spaces, copy the correspondi	ng information fr	om Section A.	FOR INSURANCE COMPANY USE
	ding Street Address (including Apt., Unit, Suite, and 12 4TH ST E	/or Bldg. No.) or P	O. Route and Box No.	Policy Number:
City RE		State Florida	ZIP Code 33708	Company NAIC Number
	SECTION E BUILDING ELI FOR ZONE		MATION (SURVEY NO A (WITHOUT BFE)	T REQUIRED)
com	Zones AO and A (without BFE), complete Items E1- uplete Sections A, B,and C. For Items E1–E4, use n er meters.	–E5. If the Certifica atural grade, if ava	ate is intended to support ilable. Check the measu	a LOMA or LOMR-F request, rement used. In Puerto Rico only,
E1.	Provide elevation information for the following and the highest adjacent grade (HAG) and the lowest a a) Top of bottom floor (including basement,			ner the elevation is above or below
	crawlspace, or enclosure) is b) Top of bottom floor (including basement,		feet met	ers 🔲 above or 📋 below the HAG.
- 2	crawlspace, or endosure) is		feet met	_
E2.	For Building Diagrams 6–9 with permanent flood of the next higher floor (elevation C2.b in the diagrams) of the building is	penings provided ii	n Section A Items 8 and/	
E3.	Attached garage (top of slab) is		feet met	ers above or below the HAG.
E4.	Top of platform of machinery and/or equipment servicing the building is		feet met	ers above or below the HAG.
E5.	Zone AO only: If no flood depth number is available floodplain management ordinance? Yes	e, is the top of the No Unknow	bottom floor elevated in a n. The local official mus	accordance with the community's at certify this information in Section G.
	SECTION F - PROPERTY OWN	NER (OR OWNER	S REPRESENTATIVE)	CERTIFICATION
The	property owner or owner's authorized representative imunity-issued BFE) or Zone AO must sign here. The	ve who completes sine statements in Se	Sections A, B, and E for 2 ections A, B, and E are c	Zone A (without a FEMA-issued or or correct to the best of my knowledge.
Pro	perty Owner or Owner's Authorized Representative	s Name		
Add	ress	Ci	ty	State ZIP Code
Sig	nature	Da	ate	Telephone
Cor	nments			
				☐ Check here if attachments.
				La oncon noto a attacimiento.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

MPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE					
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. Policy Number:					
City REDINGTON BEACH	State Florida	ZIP Code 33708	Company NAIC Number		
SECTIO	ON G - COMMUNITY INFORM	IATION (OPTIONAL)			
The local official who is authorized by law or or Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, en	Certificate. Complete the app ter meters.	licable item(s) and sign	n below. Check the measurement		
G1. The information in Section C was taken engineer, or architect who is authorized taken in the Comments area below.)	ed by law to certify elevation in	nformation. (Indicate th	ne source and date of the elevation		
G2. A community official completed Section Zone AO.	on E for a building located in 2	Cone A (without a FEM	A-issued or community-issued BFE)		
G3. The following information (Items G4–	-G10) is provided for communi	ty floodplain managem	ent purposes.		
G4. Permit Number	G5. Date Permit Issued		Date Certificate of Compliance/Occupancy Issued		
G7. This permit has been issued for:	New Construction Subst	antial Improvement			
G8. Elevation of as-built lowest floor (including of the building:	g basement)	fee	t meters		
G9. BFE or (in Zone AO) depth of flooding at t	the building site:	fee	t meters Datum		
G10. Community's design flood elevation:		fee	t meters Datum		
Local Official's Name	Title				
Community Name	Telep	hone			
Signature	Date				
Comments (including type of equipment and loc	cation, per C2(e), if applicable				
			Check here if attachments.		

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008

Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy	FOR INSURANCE COMPANY USE Policy Number:		
Building Street Address (including Apt. 16112 4TH ST E			
City REDINGTON BEACH	State Florida	ZIP Code 33708	Company NAIC Number

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

Photo One Caption **FRONT VIEW** Clear Photo One



Photo Two

Photo Two Caption **REAR VIEW** Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy	FOR INSURANCE COMPANY USE Policy Number:		
Building Street Address (including Apt 16112 4TH ST E			
City REDINGTON BEACH	State Florida	ZIP Code 33708	Company NAIC Number

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption RIGHT VIEW

Clear Photo Three



Photo Four

Photo Four Caption LEFT VIEW

Clear Photo Four



Most Widely Accepted and Trusted

ICC-ES Evaluation Report

ESR-3560

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

Reissued 09/2018 This report is subject to renewal 09/2019.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS:
MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





ICC-ES Evaluation Report

ESR-3560

Reissued September 2018

This report is subject to renewal September 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFWF12; FFWF08; FFWF08; FFWF05; FFWF05

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012 and 2009 International Building Code® (IBC)
- 2018, 2015, 2012 and 2009 International Residential Code® (IRC)

Properties evaluated:

- Physical operation
- Water flow
- Weathering

2.0 USES

Flood Flaps[®] automatic flood vents are used to provide for the equalization of hydrostatic flood forces on exterior walls. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

Flood Flaps[®] automatic flood vents are engineered mechanically operated flood vents (FVs) that automatically allow flood waters to enter and exit enclosed areas. The FVs are constructed of ABS plastic which serves as the FV's housing, and a front grill that contains an anodized metal screen imbedded in polypropylene plastic. On contact with rising flood water, the grill will disengage from its secured position, allowing flood water and debris to flow through in either direction. The FVs are available in two series as described in Section 3.3.

The sealed series models contain two rubber flaps that close the FV to the passage of air when using with conditioned areas or sealed crawl spaces. In the same manner as the grill, the two rubber flaps are pushed open by water pressure, allowing water and debris to flow through the FV in either direction. See Figure 1 for an illustration of the Flood Flaps automatic FV.

3.2 Engineered Opening:

The Flood Flaps® automatic FVs comply with the design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 (2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/SEI 24-05 (2012 and 2009 IBC and IRC)] for a rate of rise and fall of 5 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Flood Flaps® automatic FVs must be installed in accordance with Section 4.0.

3.3 Flood Vent Series Models:

Flood Flaps[®] automatic FVs are available in two series with multiple models and sizes as described in Table 1. The sealed series models, designated FFWF, include two rubber flaps for the prevention of air flow. The multipurpose series, designated FFNF, omits the rubber flaps.

3.4 Natural Ventilation:

Flood Flaps[®] automatic FV models FFNF12, FFNF08, FFNF05, and FFNF02 have metal screens with ¹/₄ inch by ¹/₄ inch (6 mm by 6 mm) openings and provide 37 square inches (0.02 m²) of net free opening to supply natural ventilation for under-floor ventilation. Flood Flaps[®] automatic FV models FFWF12, FFWF08, and FFWF05 have not been evaluated for use as openings for underfloor ventilation.

4.0 DESIGN AND INSTALLATION

Flood Flaps® automatic FVs are designed to be installed into walls of existing or new construction. Installation of the FVs must be in accordance with the manufacturer's instructions, the applicable code and this report. Flood Flaps® automatic FVs can be installed in wood, masonry and concrete walls up to a thickness of 12 inches (305 mm). In order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 (2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/SEI 24-05 (2012 and 2009 IBC and IRC)], the Flood Flaps® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 220 square feet (20 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305 mm) above grade.

5.0 CONDITIONS OF USE

The Flood Flaps[®] automatic flood vents described in this report comply with, or are suitable alternatives to what is



specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The Flood Flaps[®] automatic FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Flood Flaps[®] automatic FVs must not be used in place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).

7.0 IDENTIFICATION

7.1 The Flood Flaps[®] models recognized in this report are identified by a label bearing the manufacturer's name, the model number, and the evaluation report number (ESR-3560). 7.2 The report holder's contact information is the following:

FLOOD FLAPS[®], LLC
POST OFFICE BOX 1003
ISLE OF PALMS, SOUTH CAROLINA 29451
(843) 881-0190
www.floodflaps.com
info@floodflaps.com

TABLE 1-FLOOD FLAP AUTOMATIC FLOOD VENT MODEL SIZES

MODEL NUMBER	MODEL DESIGNATION	ROUGH OPENING (Width X Height) (inches)	VENT SIZE (W X H X D) (inches)	ENCLOSED AREA COVERAGE (ft²)	NET FREE AREA OPENING ¹ (in ²)
FFWF12	Sealed Series	16 x 8	15 ⁵ / ₈ X 7 ³ / ₄ X 12	220	NA
FFNF12	Multi-Purpose	16 x 8	15 ⁵ / ₈ X 7 ³ / ₄ X 12	220	37
FFWF08	Sealed Series	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 8	220	NA
FFNF08	Multi-Purpose	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 8	220	37
FFWF05	Sealed Series	16 x 8	15 ⁵ / ₈ × 7 ³ / ₄ × 5	220	NA NA
FFNF05	Multi-Purpose	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 5	220	37

For SI: 1 inch = 25.4 mm; $1 \text{ f}^2 = 0.093 \text{ m}^2$

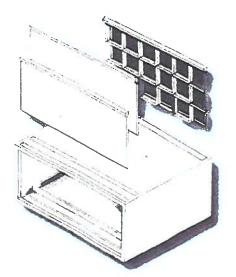


FIGURE 1-FLOOD FLAPS® AUTOMATIC FLOOD VENT

¹For under-floor ventilation only.

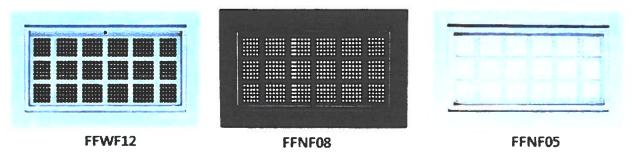


FIGURE 2—FLOOD FLAPS® AUTOMATIC FLOOD VENT SERIES MODELS

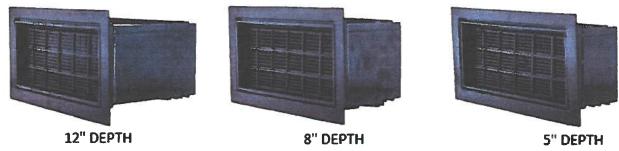


FIGURE 3—FLOOD FLAPS® AUTOMATIC FLOOD VENTS MULTIPLE DEPTH OFFERINGS



ICC-ES Evaluation Report

ESR-3560 FBC Supplement

Reissued September 2018

This report is subject to renewal September 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Flood Flaps[®] automatic flood vents, recognized in ICC-ES master evaluation report ESR-3560, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

2.0 CONCLUSIONS

The Flood Flaps flood vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-3560, comply with the *Florida Building Code—Building and the Florida Building Code—Residential*, provided the design and installation are in accordance with the 2015 *International Building Code®* provisions noted in the master report.

Use of the Flood Flaps flood vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality-assurance program is audited by a quality-assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official, when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the master report, reissued September 2018.

